



Product overview

A larger single toilet room with a basin, ramp platform, external handrails and contrasting internal support rails. No New Zealand accessibility compliance is claimed.

Indent order only

This product is not normally held in stock. Choose full payment or a 50% deposit to place an indent order. The balance is due before dispatch or collection.

Specifications

DIMENSIONS

2075 mm × 1325 mm × 2320 mm

APPROX. WEIGHT

480 kg

CONFIGURATION

Single toilet and basin with ramp and support rails

UNIT DIMENSIONS

2075 × 1325 × 2320 mm; ramp adds to operating footprint

STRUCTURE

Q235 steel frame and steel roof

RAMP

Tread-plate platform with external handrails

WALLS AND ROOF

50 mm EPS composite panels

FLOOR

12 mm rigid PVC plus 3 mm anti-slip finish

WATER INLET

20 PPR pipe with 1/2-inch connection

DRAIN OUTLETS

Ø40 drain; Ø90 toilet discharge

ELECTRICAL

concealed wiring, 16 A breaker, 32 A aviation socket, 18 W light and fan


Key features

- Tread-plate access ramp with external handrails
- Ceramic toilet and pedestal hand basin
- Floor drain, ventilation, lighting and window
- Larger single-room toilet layout
- Contrasting fixed/foldable internal support rails
- Factory electrical and plumbing fit-out with external connection points


SITE CONNECTION REQUIRED

Internally wired and plumbed, but not plug and play or self-contained. Final service connections, testing and certification are required.


External elevation A

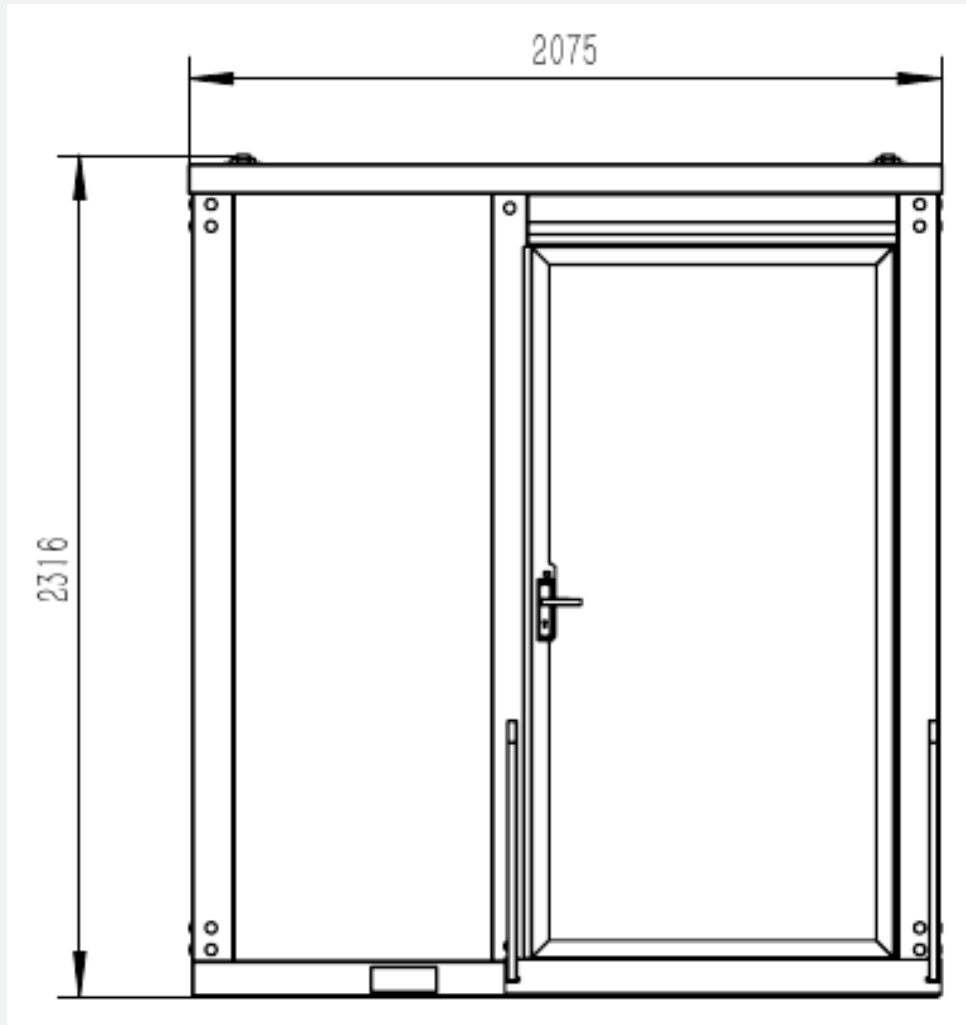


External elevation B

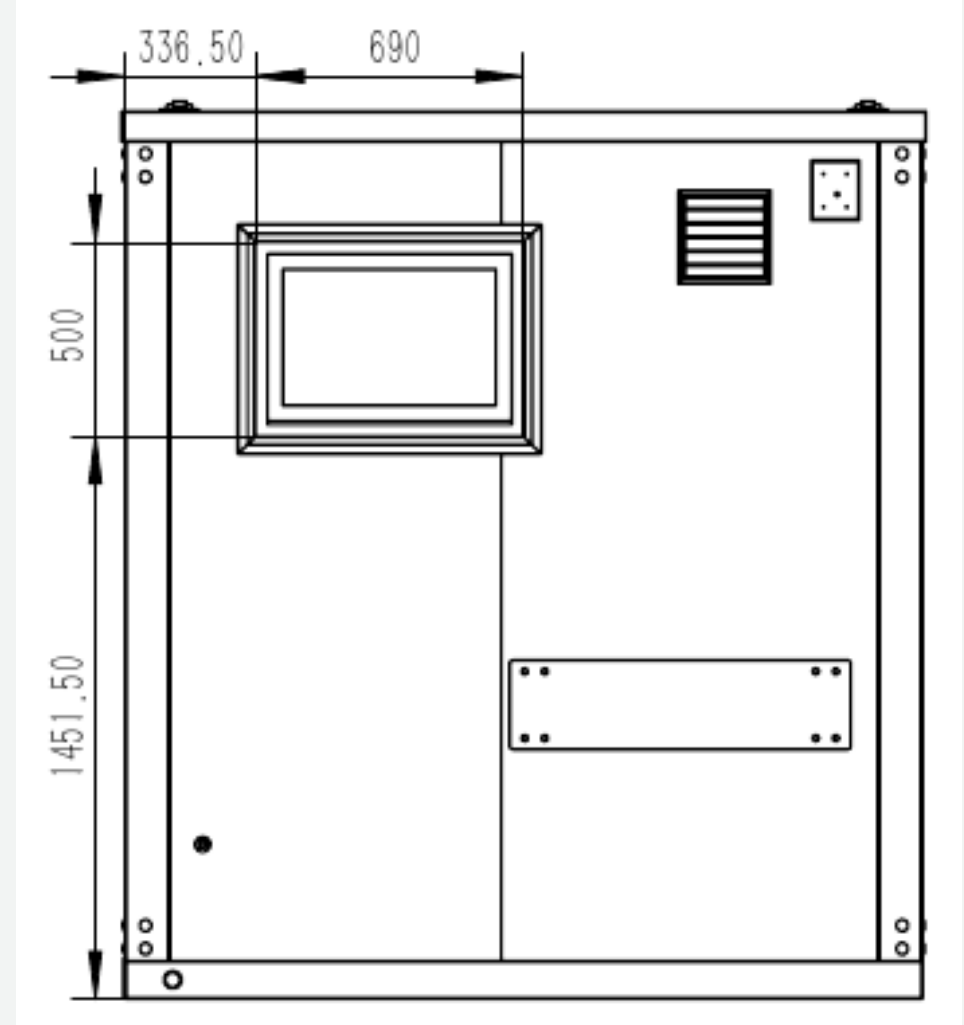


External elevation C

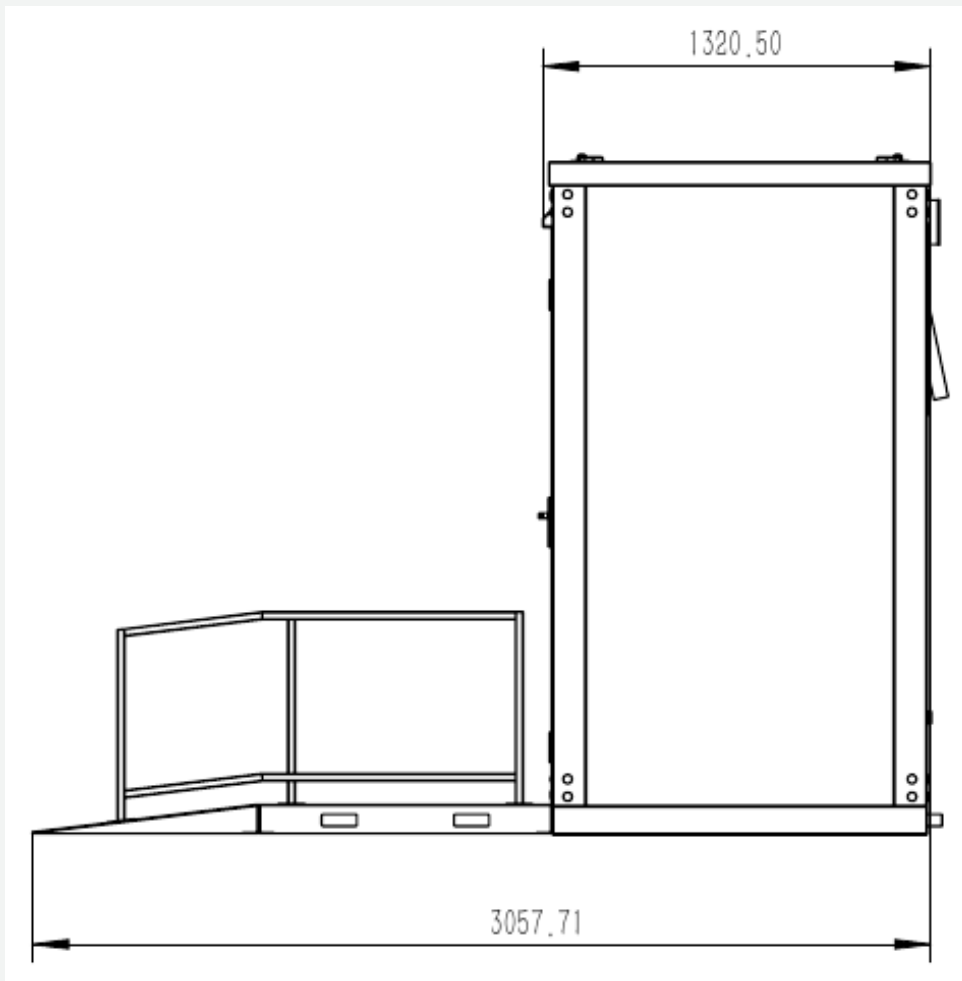


External elevation D

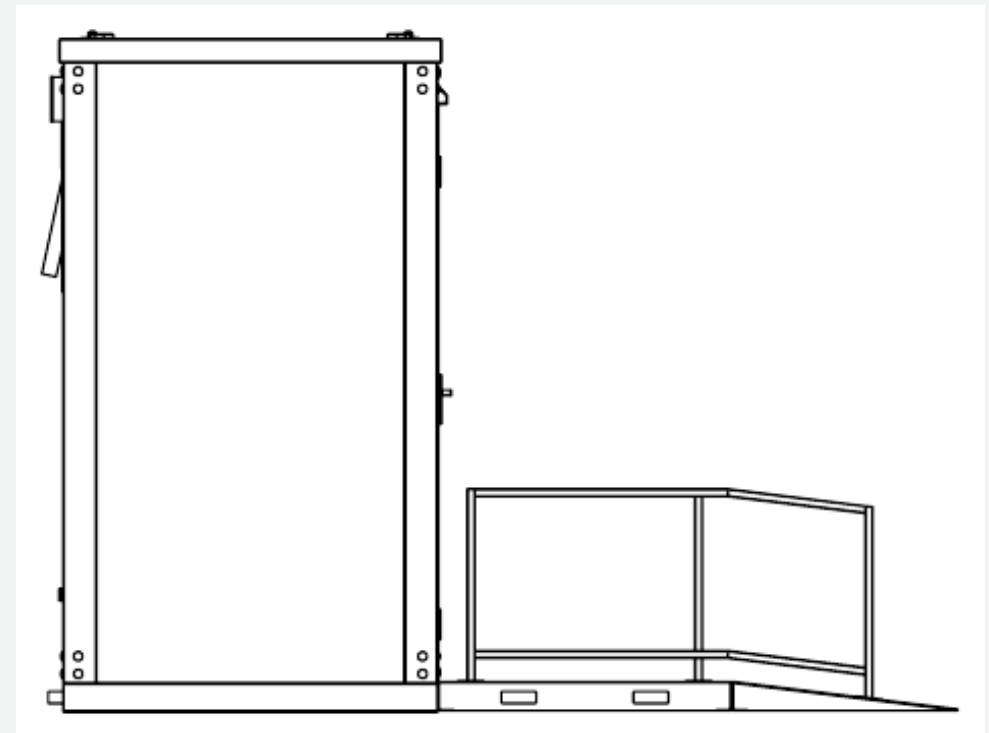


Front elevation

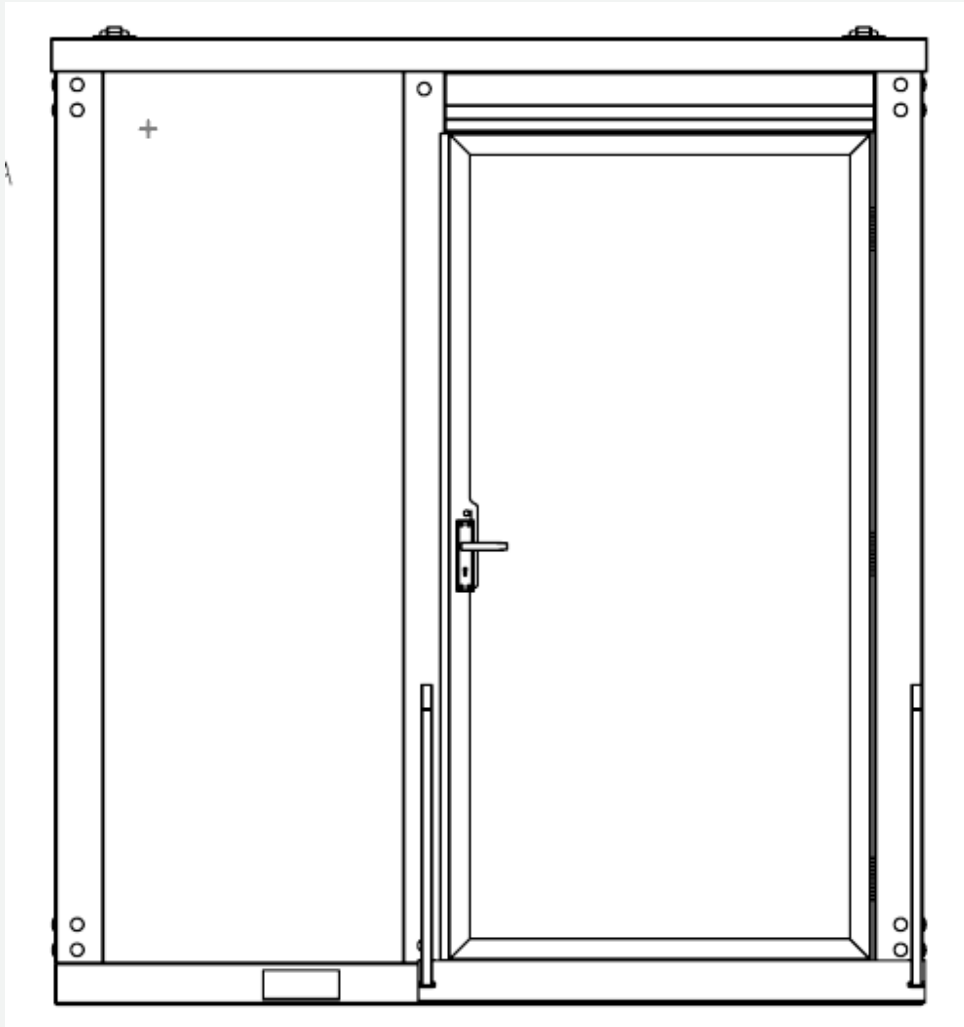


Bird's-eye plan

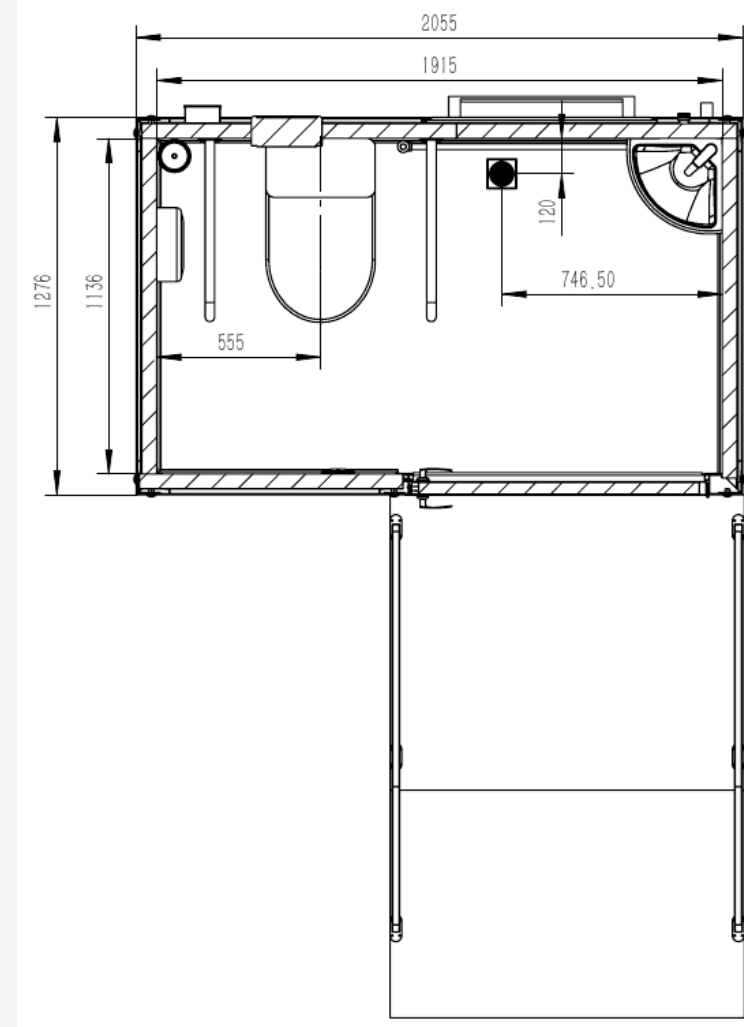


Upper section 1

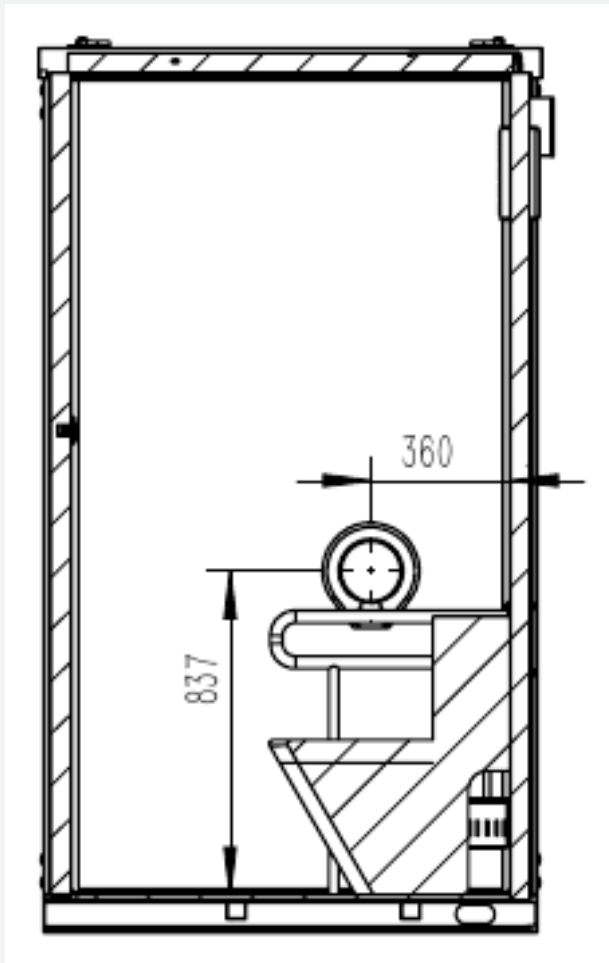


Upper section 2

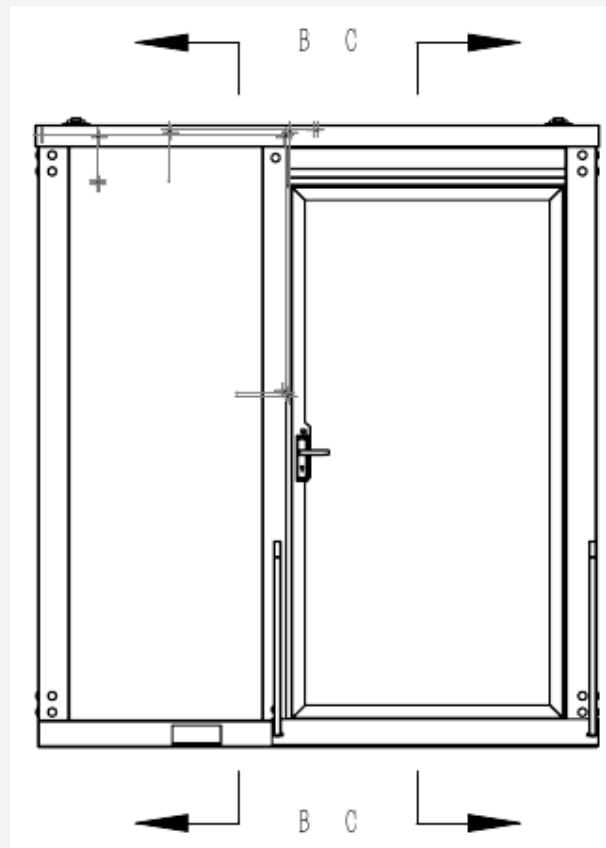


Upper section 3

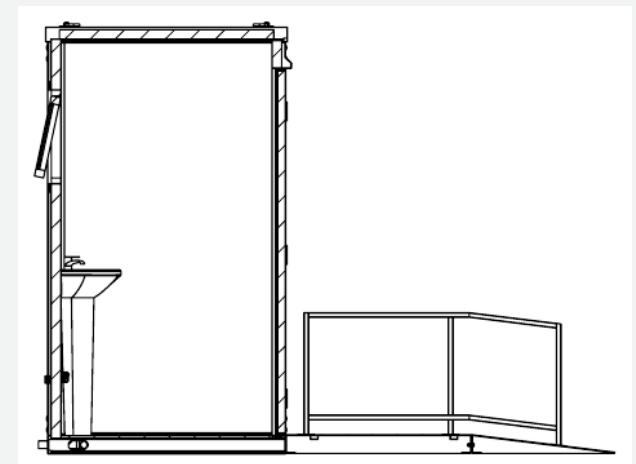

Lower section 1

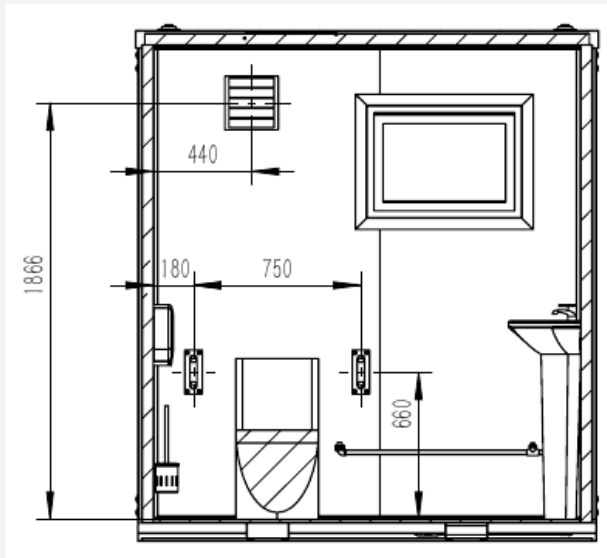

Lower section 2

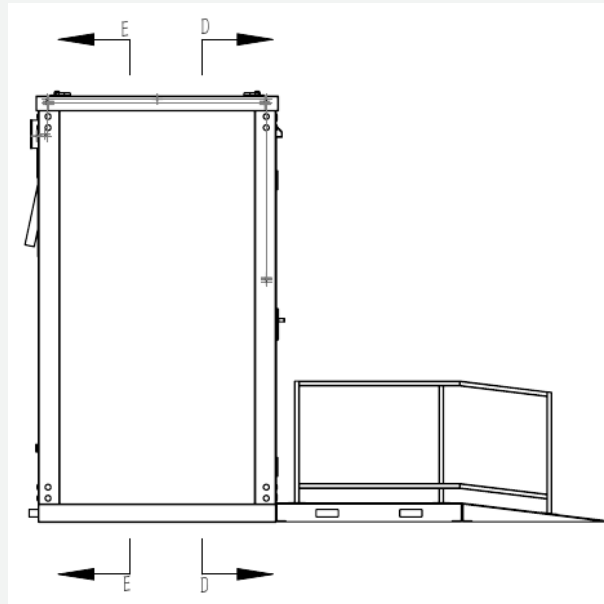

Lower section 3

