



## Product overview

A relocatable double-shower module with two separately entered cubicles, shower fittings, floor drainage, ventilation and lighting.

### Indent order only

This product is not normally held in stock. Choose full payment or a 50% deposit to place an indent order. The balance is due before dispatch or collection.

## Specifications

### DIMENSIONS

2075 mm × 1325 mm × 2320 mm

### APPROX. WEIGHT

480 kg

### CONFIGURATION

Two separate shower cubicles

### STRUCTURE

Q235 steel frame and steel roof

### WALLS AND ROOF

50 mm EPS composite panels

### FLOOR

12 mm rigid PVC plus 3 mm anti-slip finish

### WATER INLET

20 PPR pipe with 1/2-inch connection

### DRAIN OUTLET

Ø40 general drain listed

### ELECTRICAL

concealed wiring, 16 A breaker, 32 A aviation socket, lighting and fan


## Key features

- Two separately entered shower cubicles
- Shower fittings and floor drainage shown in both rooms
- Factory electrical fit-out with ventilation, lighting and circuit protection
- Factory plumbing fit-out with water and drain connection points
- Steel frame and insulated composite panels
- Anti-slip and wear-resistant flooring


### SITE CONNECTION REQUIRED

Internally wired and plumbed, but not plug and play or self-contained. Final service connections, testing and certification are required.


External elevation A

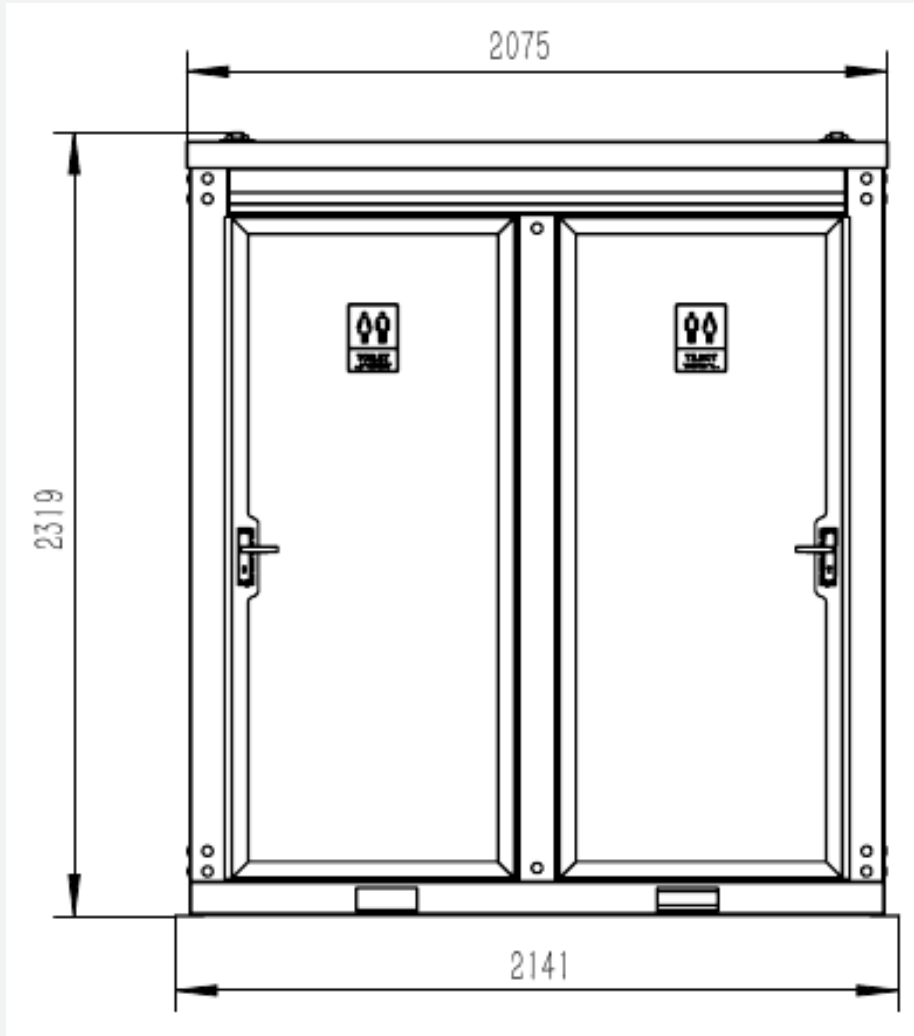


External elevation B

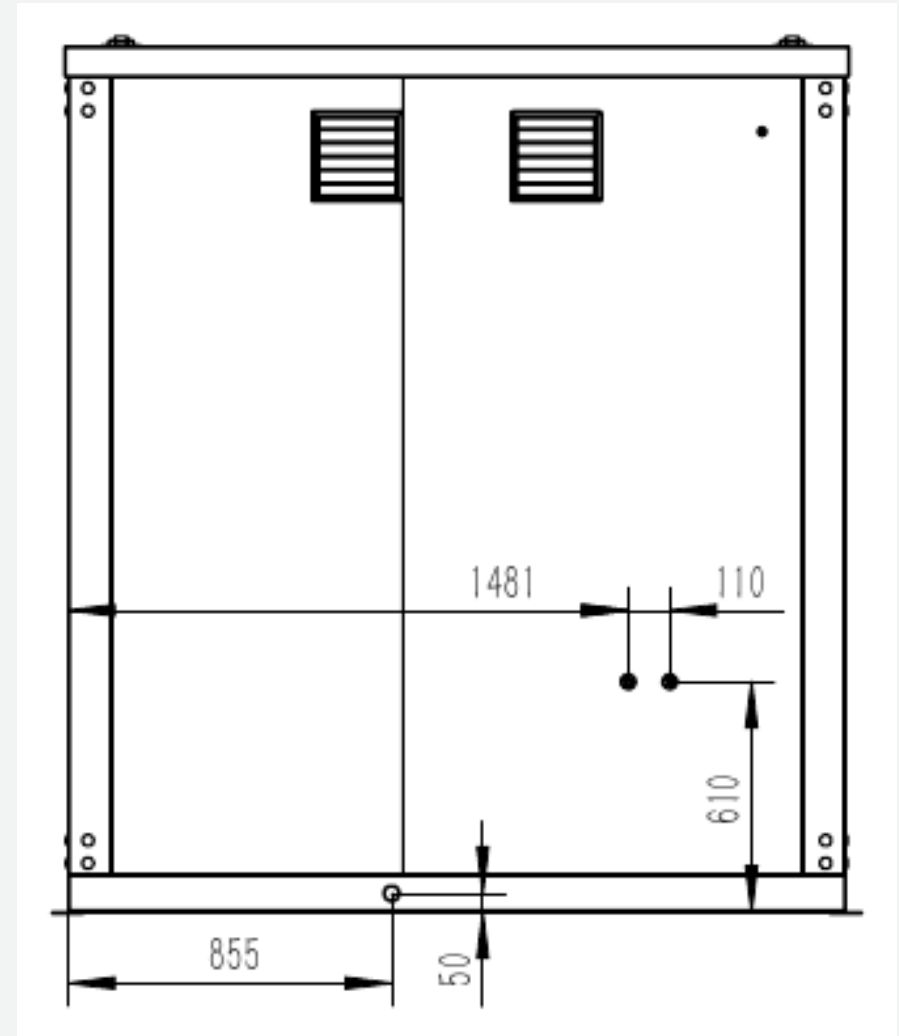


External elevation C

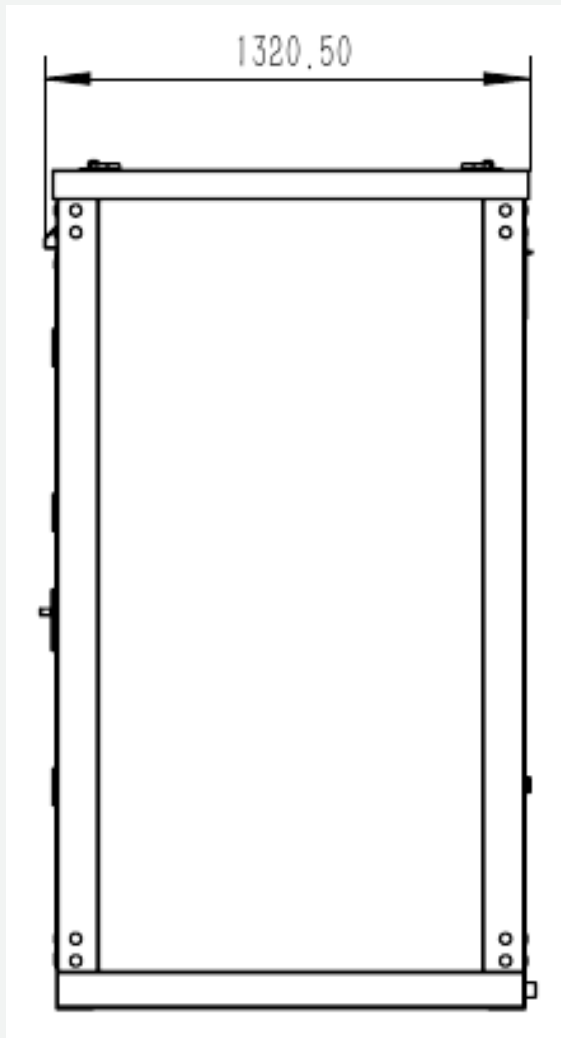


External elevation D

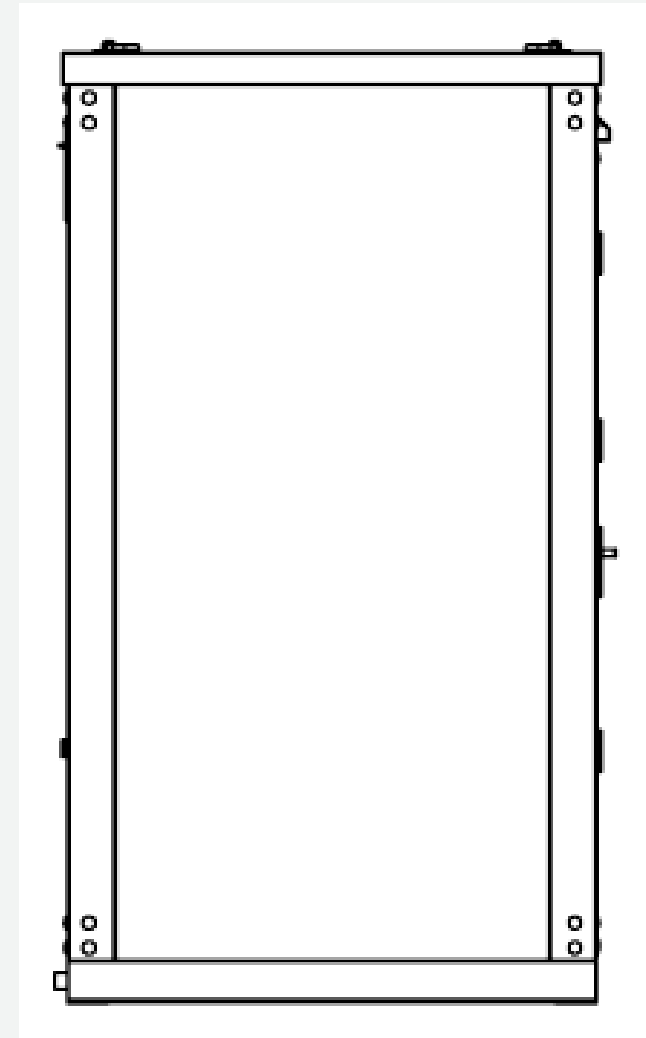


Front elevation

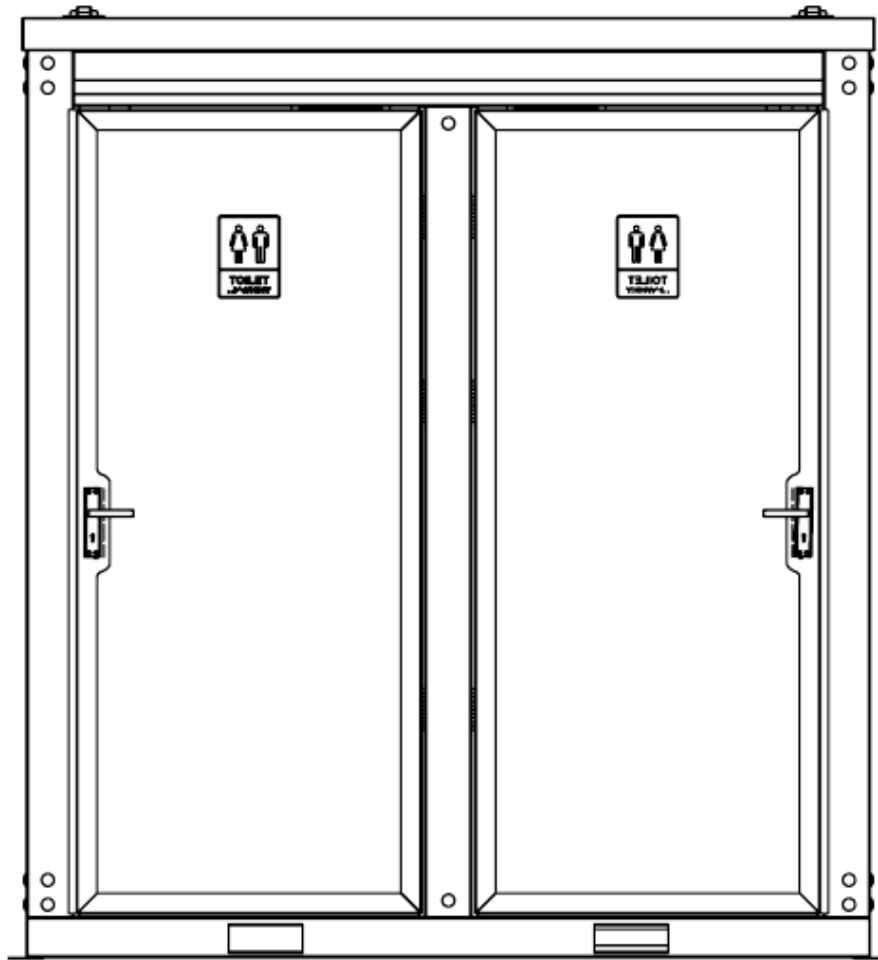


Bird's-eye plan

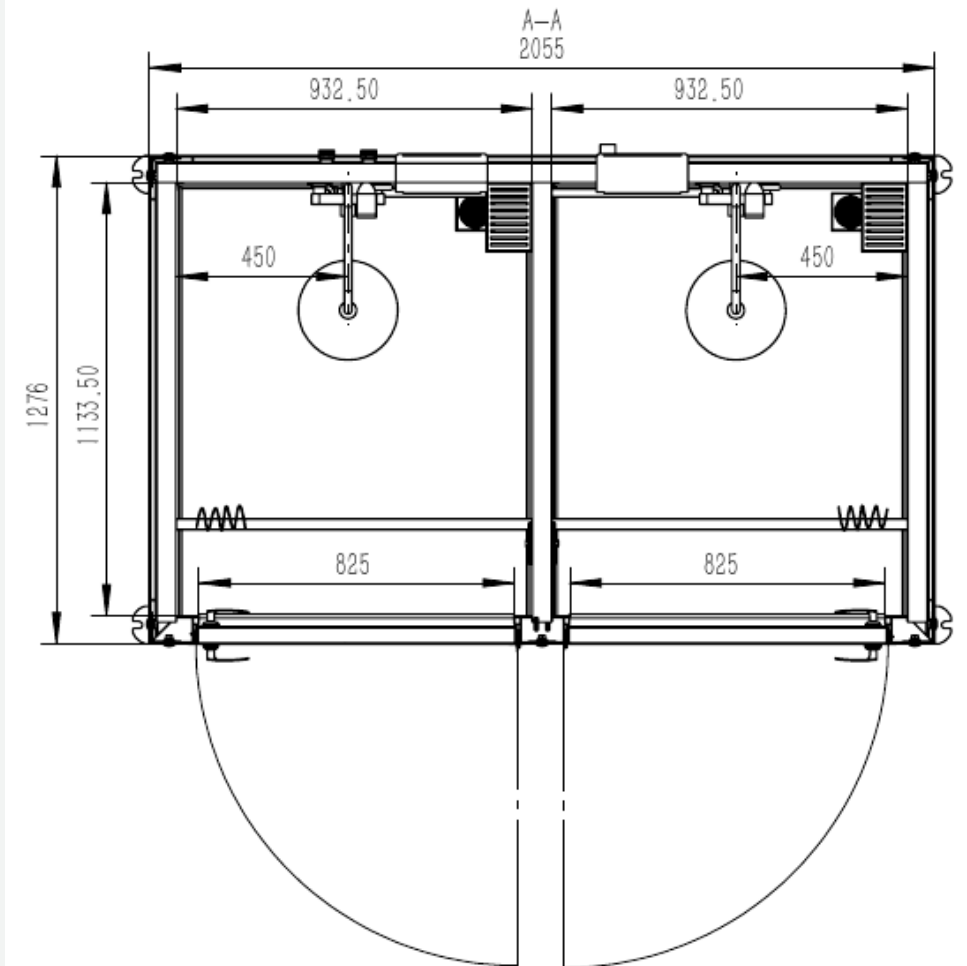

Upper section 1

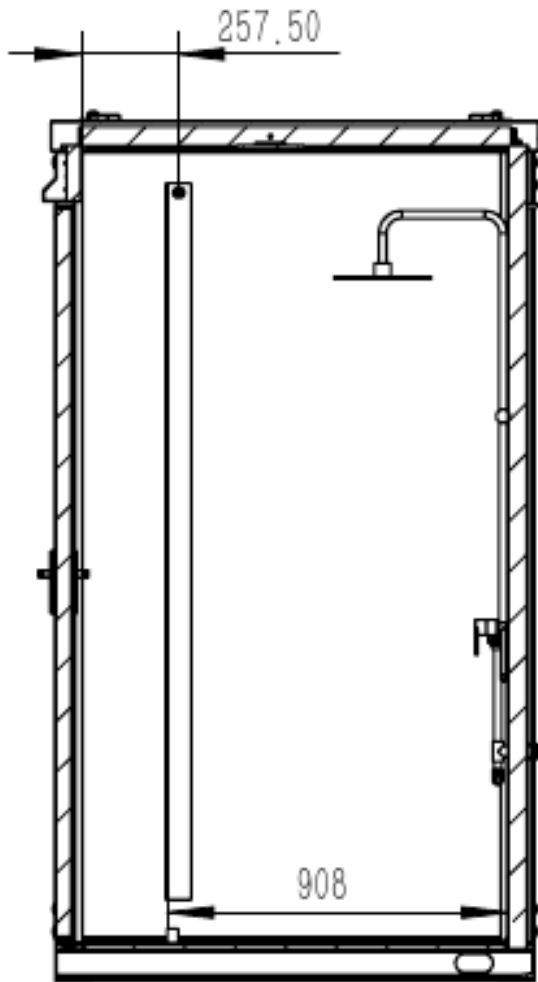


Upper section 2

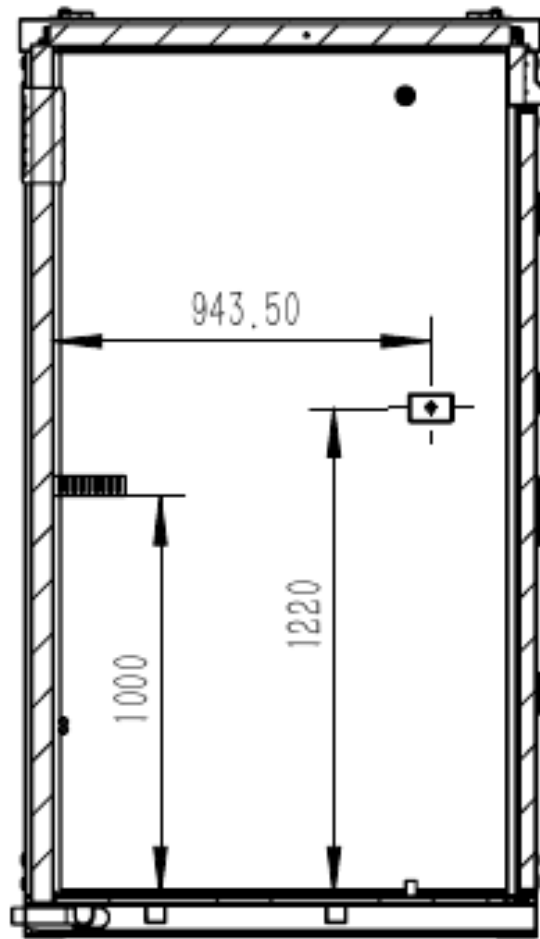


Upper section 3




Upper section 4

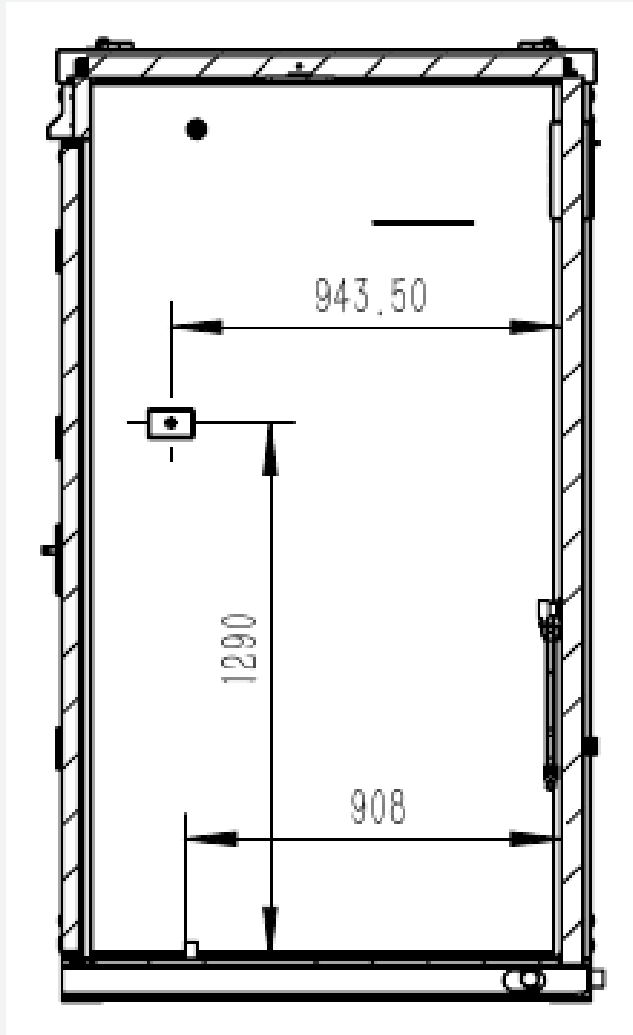


Upper section 5

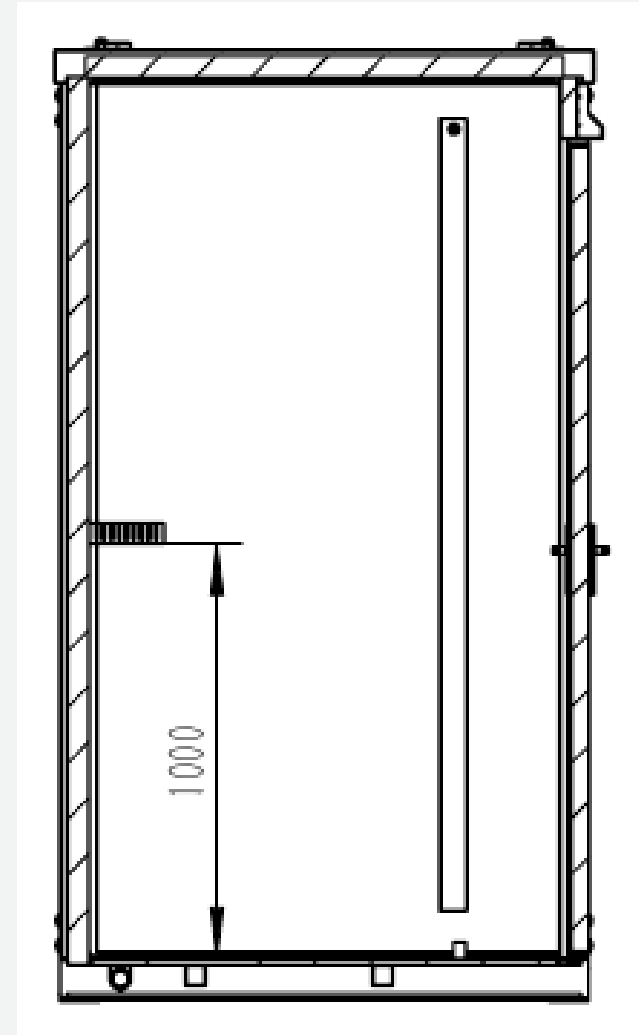

Lower section 1

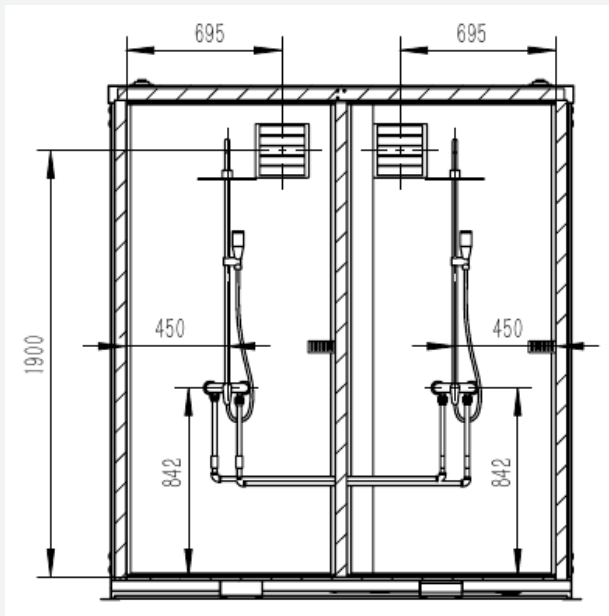

Lower section 2

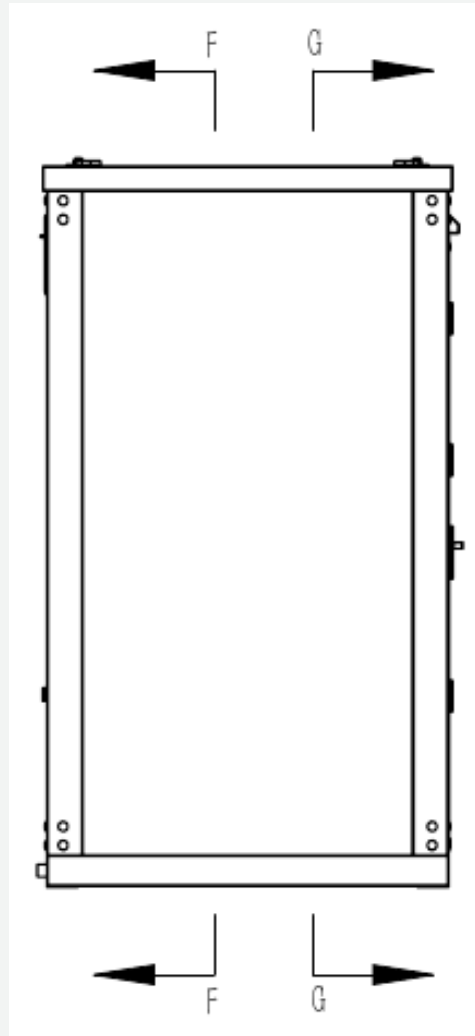

Lower section 3

