



## Product overview

The smallest footprint in the range, with a ceramic toilet, pedestal hand basin, ventilation and lighting in one private cubicle.

### Indent order only

This product is not normally held in stock. Choose full payment or a 50% deposit to place an indent order. The balance is due before dispatch or collection.

## Specifications

### DIMENSIONS

1100 mm × 1325 mm × 2320 mm

### APPROX. WEIGHT

270 kg

### CONFIGURATION

Single toilet with hand basin

### STRUCTURE

Q235 steel frame and steel roof

### WALLS AND ROOF

50 mm EPS composite panels

### FLOOR

12 mm rigid PVC plus 3 mm anti-slip/wear-resistant finish

### WATER INLET

20 PPR pipe with 1/2-inch connection

### DRAIN OUTLETS

Ø40 drain; Ø90 toilet discharge

### ELECTRICAL

concealed wiring, 16 A breaker, 32 A aviation socket, 18 W light and fan


## Key features

- Single private toilet cubicle
- Ceramic toilet and pedestal hand basin
- Factory electrical fit-out with light, fan, breaker, switches and connection socket
- Factory plumbing fit-out with water and waste connection points
- Compact steel-framed insulated shell
- Anti-slip and wear-resistant floor finish


### SITE CONNECTION REQUIRED

Internally wired and plumbed, but not plug and play or self-contained. Final service connections, testing and certification are required.


External elevation A

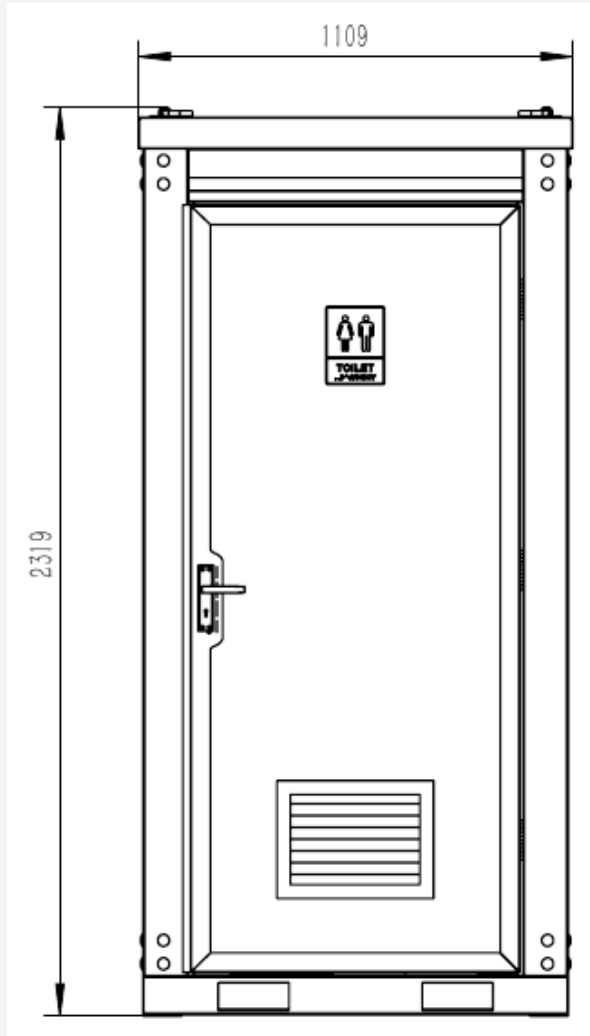


External elevation B

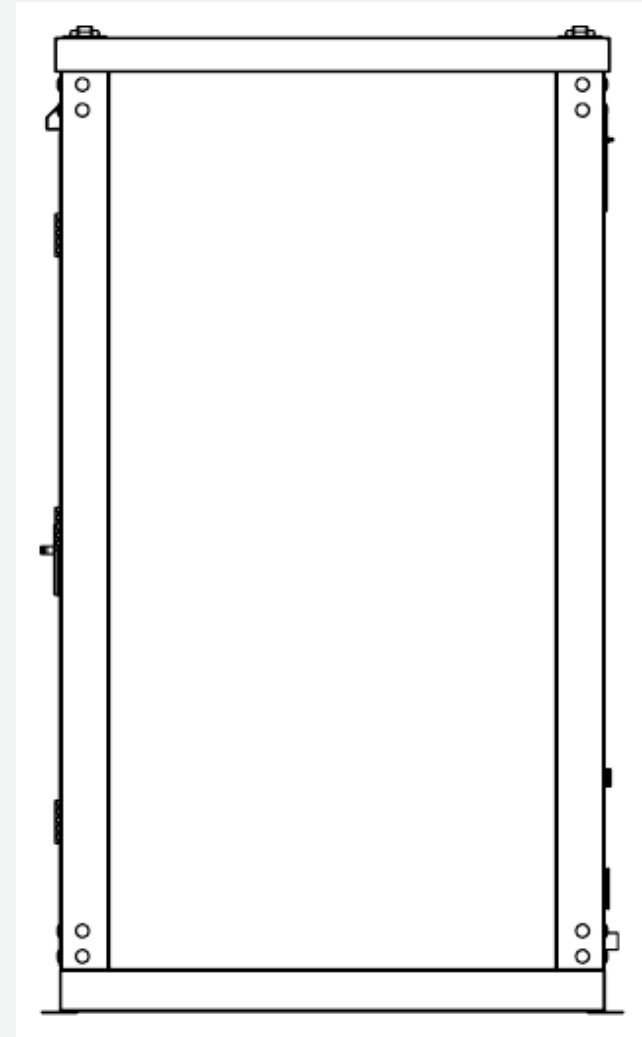


External elevation C

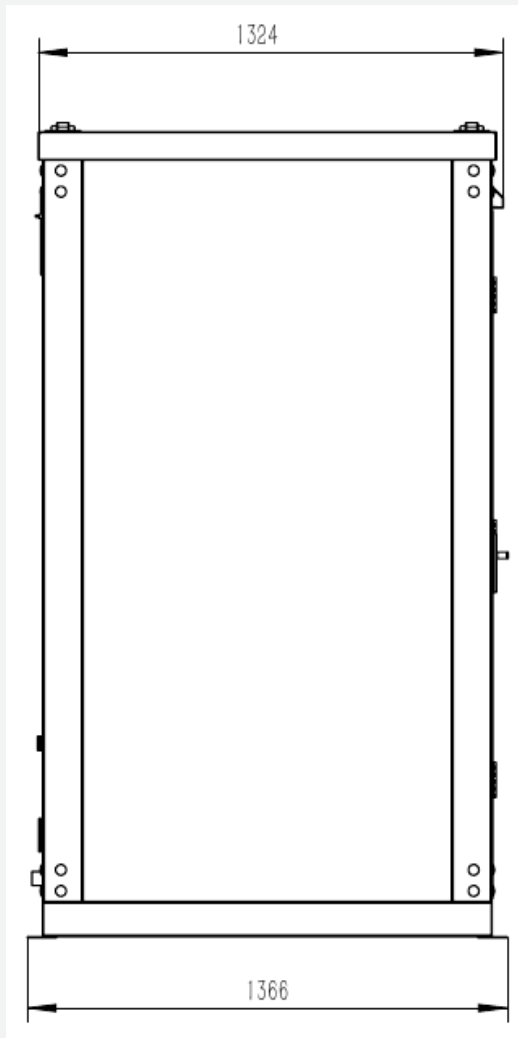


External elevation D

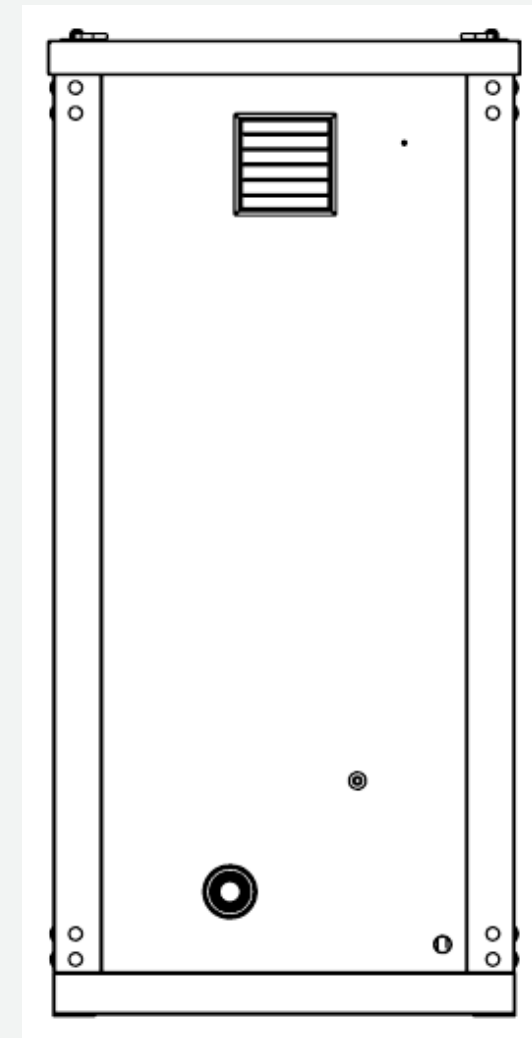


Front elevation

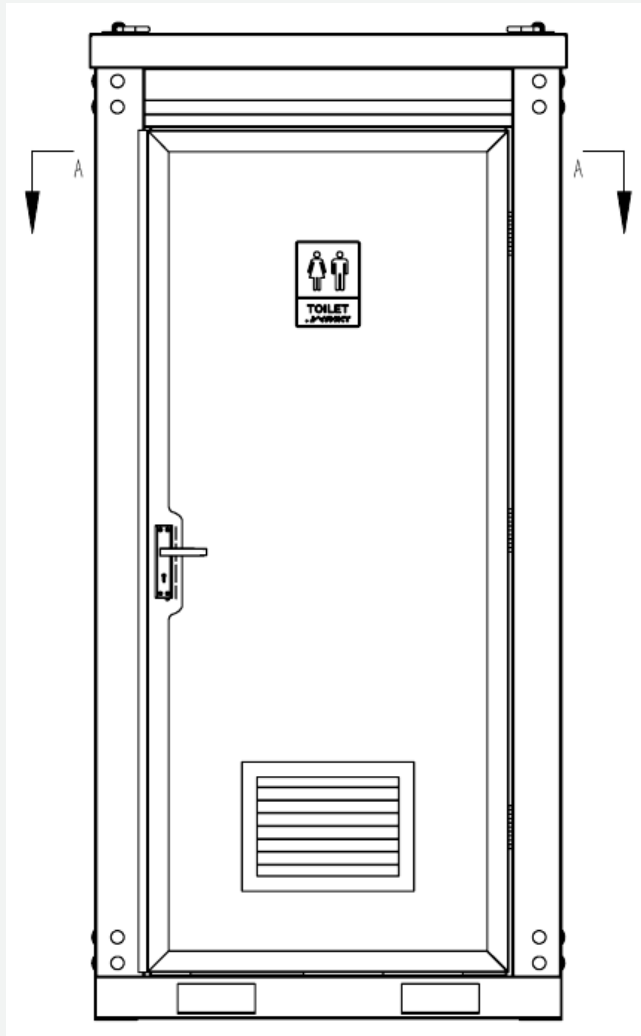


Bird's-eye plan

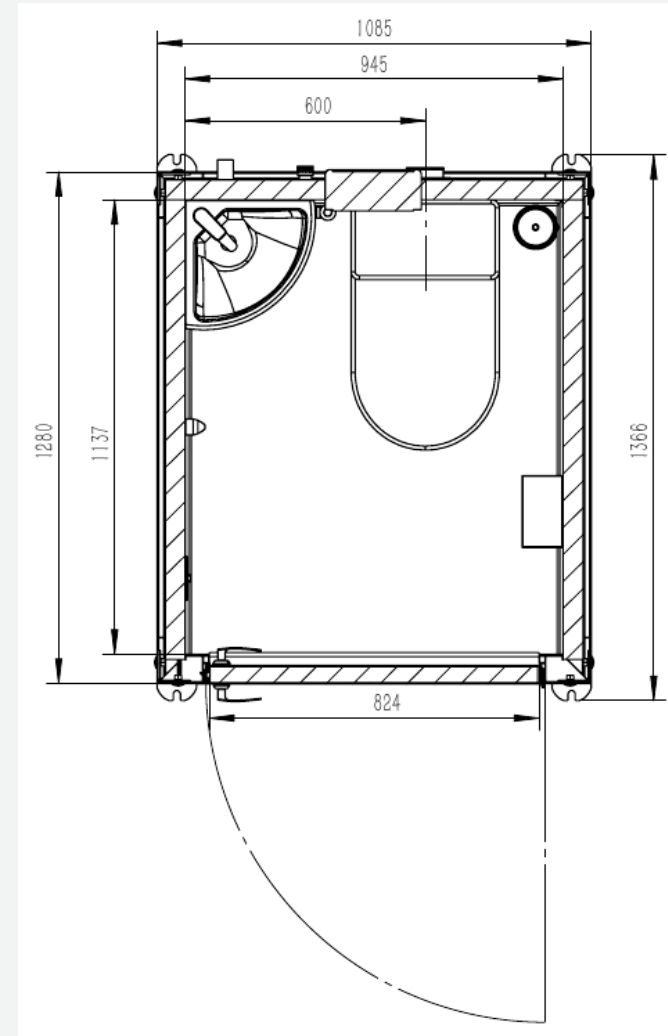


Upper section 1

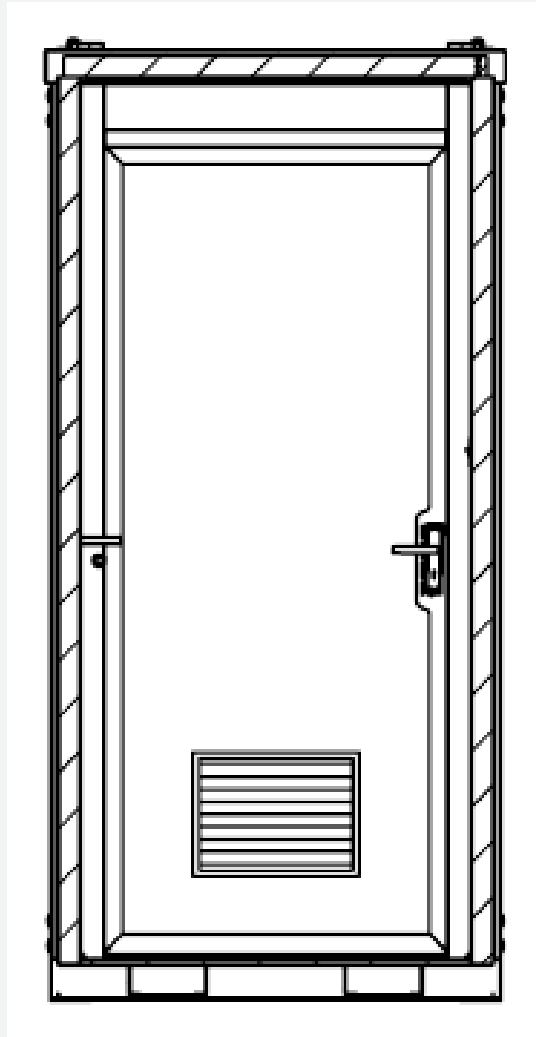


Upper section 2

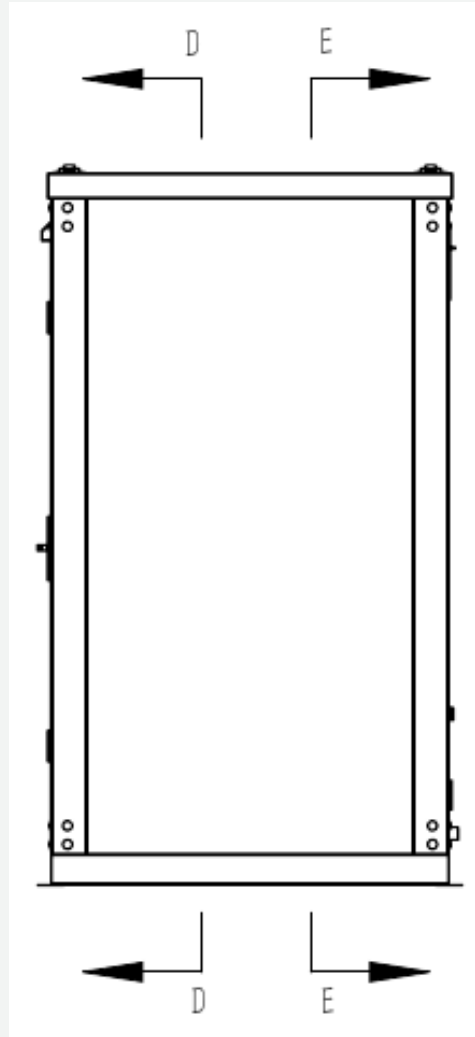


Upper section 3

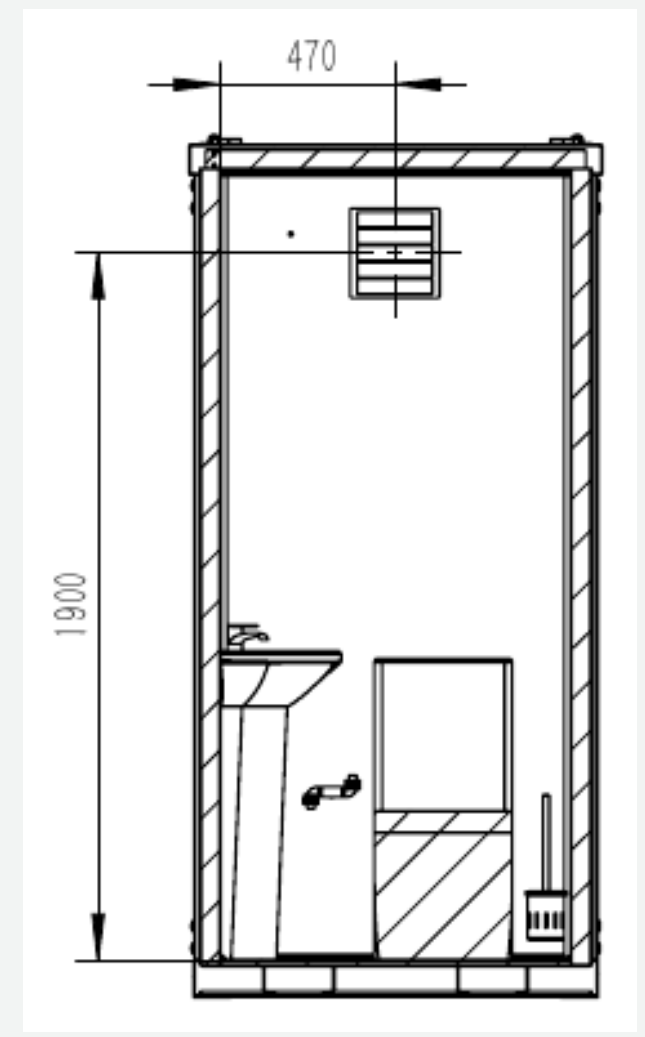

Lower section 1

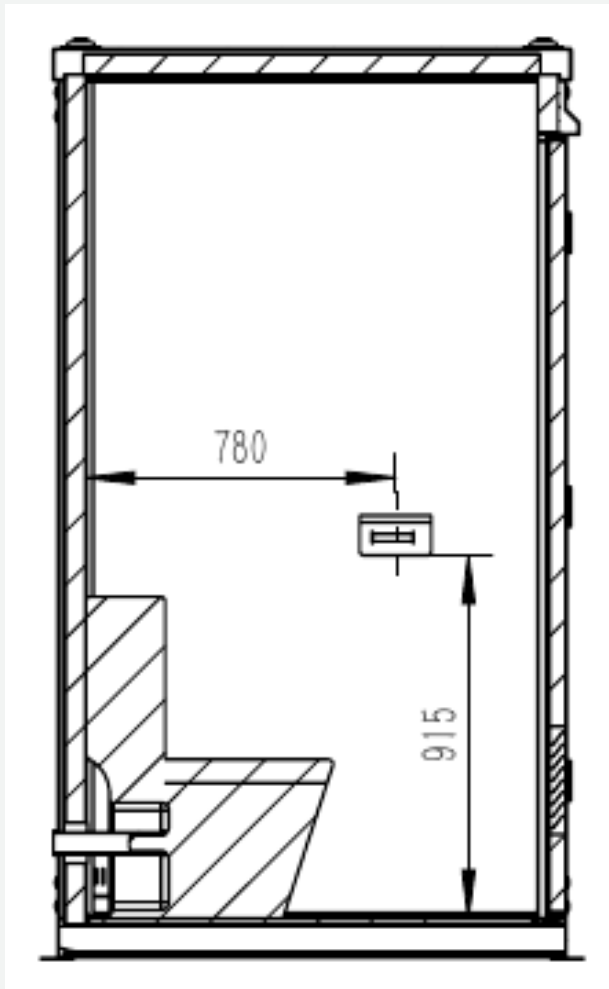

Lower section 2

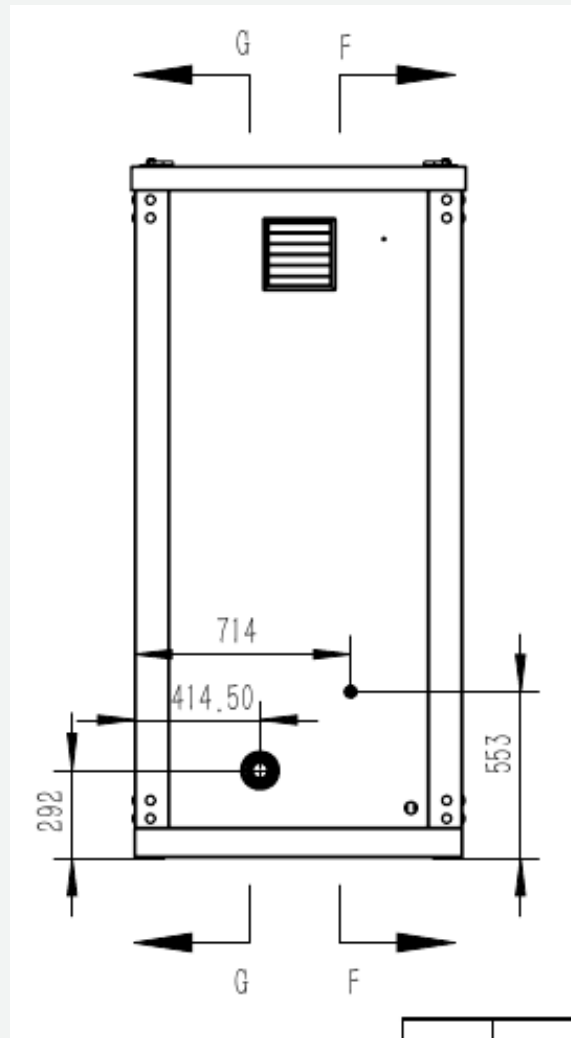

Lower section 3

